Make REFINISHING & RESTORING Your Exterior Wood EASY!

The TWP® Companion Product Series will help you bring your exterior wood back to life!

Weather and time can make wood look dingy and gray well before its replacement time. The **TWP® COMPANION PRODUCT SERIES** removes that previously applied stain to bring your wood back to looking like **NEW!**

For decks or other exterior wood that require an eco-friendly removal of a previous finish, Gemini offers an ideal solution with **SAFE STRIP**, our powerful (non-toxic) remover that will cut through an existing finish to reveal the original wood. Once Safe Stripped your wood will be prepared to refinish like new!

For exterior wood that simply needs cleaning prior to refinishing, **RESTORE-A-DECK** is your product of choice to finish with excellence! Restore-A-Deck is a two-part system that enables you to execute a powerful and eco-friendly restoration. First Restore-A-Deck Cleaner deep cleans your wood, then Restore-A-Deck Brightener neutralizes the pH and significantly brightens the wood.

Once you have prepared your exterior wood project with the TWP® Companion Product Series the stain or finish you choose will look and last its very best!

- **Concentrated, one container makes 5 gallons**
- **Prepares wood for any type of finish or re-coating**
- **Restores weathered wood to it's natural color**
- **Eco-Friendly**

for more about the TWP Companion Product Series
USETWP.COM or call **800-262-5710**

Ideal for these Exterior Wood Applications

- Furniture
- Playground equipment
- Picnic tables
- Shutters
- Trim
- Entryway and garage doors
- Railings

LOW VOC FORMULATION

WATER REPELLENT
Resists warping, cracking and splitting.
Inhibits freeze damage in colder climates.

UV RESISTANT FILM
Inhibits the growth of mold and mildew on the film surface preventing premature discoloration, keeping surfaces looking new longer.

EASY APPLICATION
Long lasting formula.
Easy to apply and maintain.

Scan here for more about TWP family of products.

Your Local TWP Dealer

for more about TWP: USETWP.com

P.O. Box 699 • 2300 Holloway Drive • EL Reno, Oklahoma 73036
toll free: 800-262-5710 • *AN EMPLOYEE OWNED COMPANY*

TWP®
TOTAL WOOD PROTECTANT

TWP 300 SERIES *Deep Gloss Exterior Wood Stain*

Restore & Protect YOUR GREAT OUTDOORS!

TWP®

TOTAL WOOD PROTECTANT

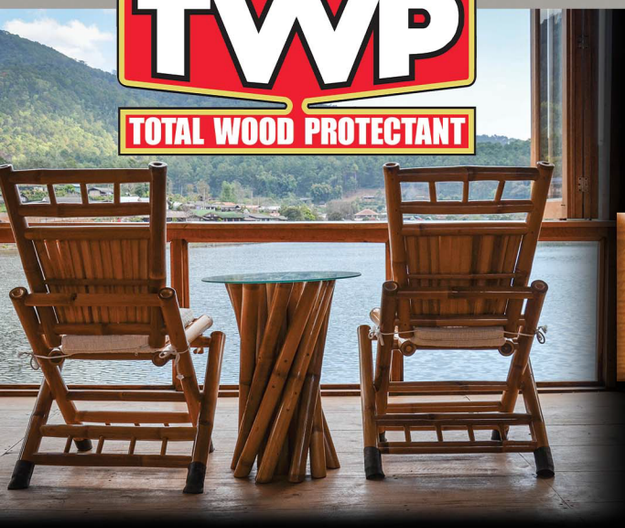

SUPERIOR PROTECTION FOR EXTERIOR WOOD SURFACES

Available in Six Rich Colors!

301 Cedartone

302 Redwood

303 Dark Oak

304 Black Walnut

311 California Redwood

315 Light Cedar

Natural Stain or Deep Gloss Finish

BEAUTIFIES & PROTECTS

- High performance formula
- Oil based
- Easy application
- Deep gloss or natural stained finish
- Prevents premature UV damage
- Mold and mildew resistant film
- Repels water

TWP-300 Clear will allow the wood to gray naturally.

FOR STAINED EFFECT

New wood should be allowed 4-12 months of natural weathering before finish coat application. Weathered wood should be cleaned and dried before finishing. If wood was previously sealed, the old finish should be removed, and the surface should be cleaned and dried before finishing. Apply as much material as the wood can absorb without leaving a glossy surface film. Typically, one coat is sufficient, but more absorbent wood may require multiple wet on wet coats. Remove any material that remains on the surface 20-30 minutes after application of the final coat to insure a uniform low gloss-stained appearance. Typically applied at 500-600 square feet per coat, but rate depends on wood porosity.

FOR DEEP GLOSS FINISH

New, old and previously sealed wood should be sanded before finish coat application. Stripping or power washing may be necessary to remove old finish prior to sanding. All sanding dust should be removed before applying finish. Apply first coat of material at 500-600 square feet per gallon. Differences in absorption will likely yield areas of low and high gloss. Allow finish to dry 24 hours or until firm. Apply a second coat at 800 – 1000 square feet per gallon. Two coats are typically needed to achieve a uniform glossy appearance, but a third coat may be needed on extremely porous wood. If a third coat is needed apply 24 hours after the second or when the second coat is firm.